





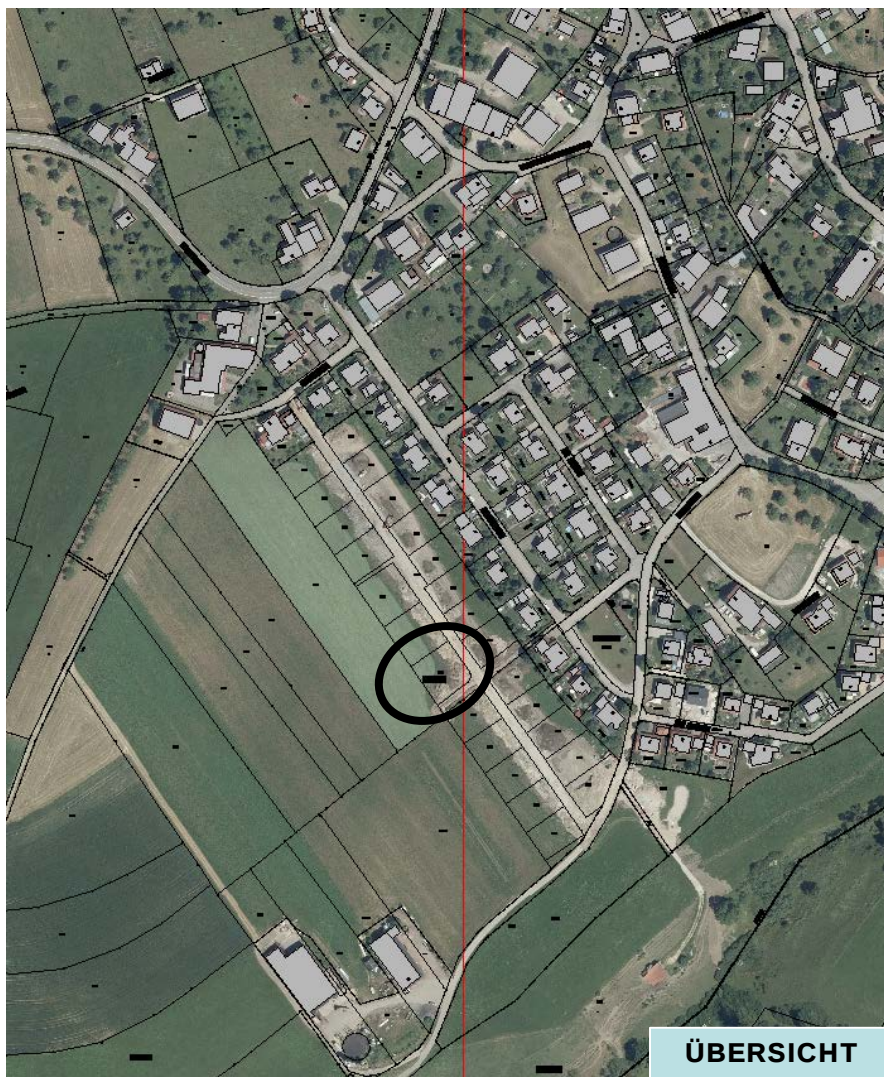

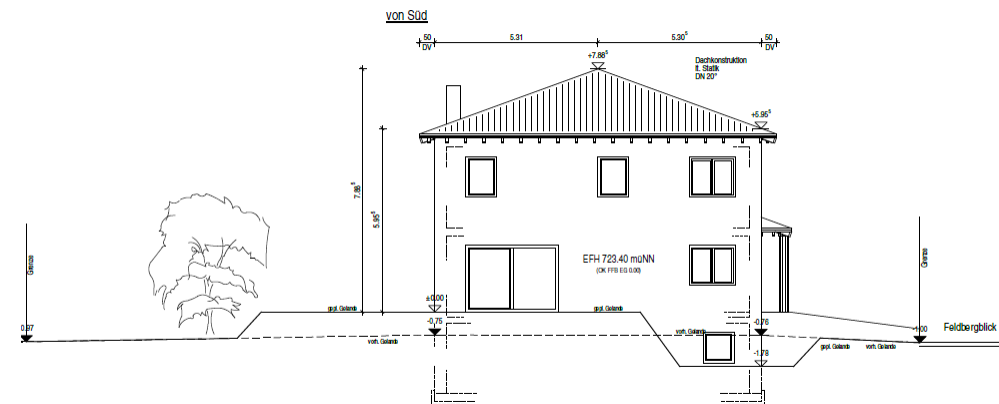


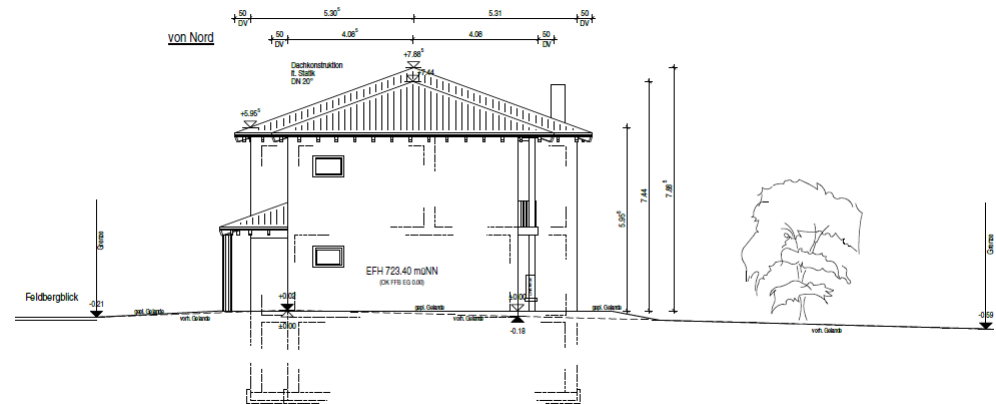

Ansicht Südwest

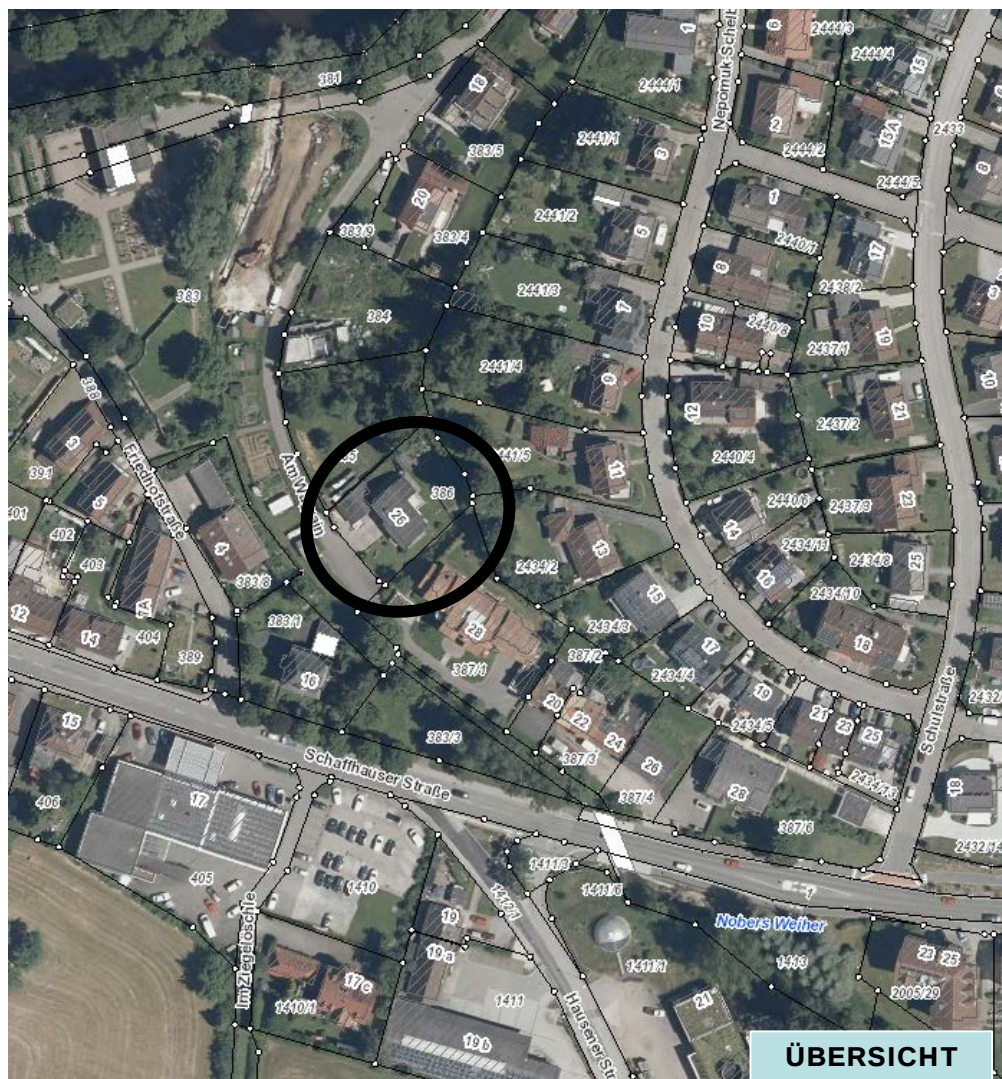

Ansicht Nordost

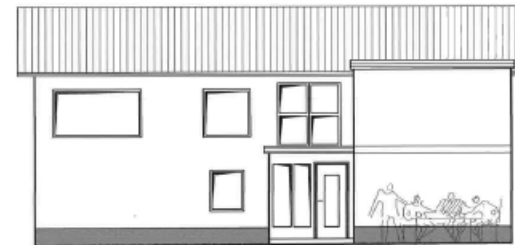


Ansicht Nordwest



ANSICHTEN

Ansicht Südost


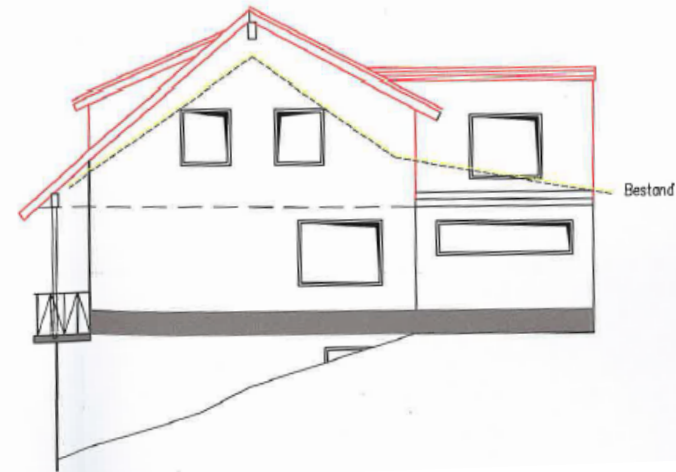





ÜBERSICHT





LAGEPLAN

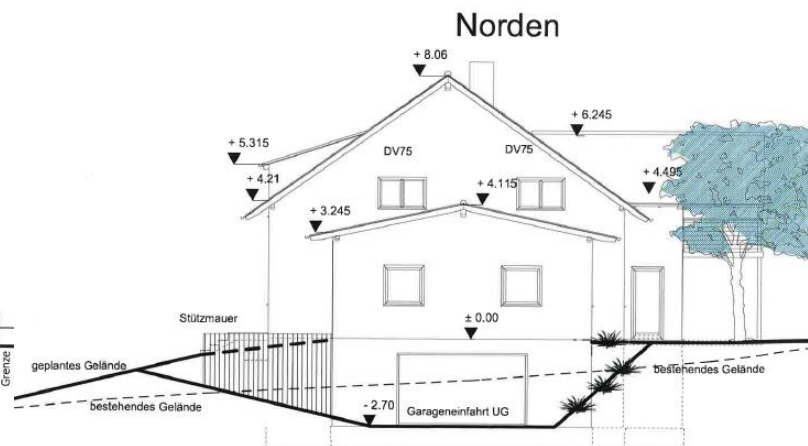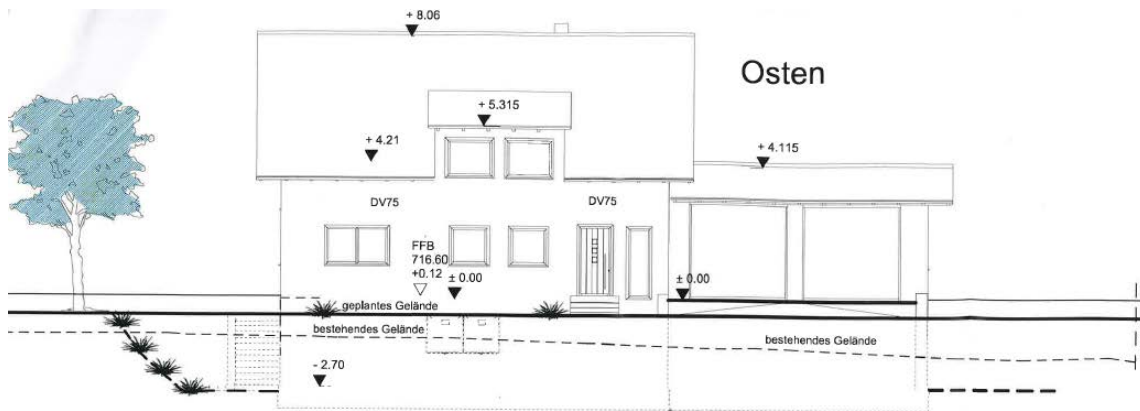


ANSICHTEN

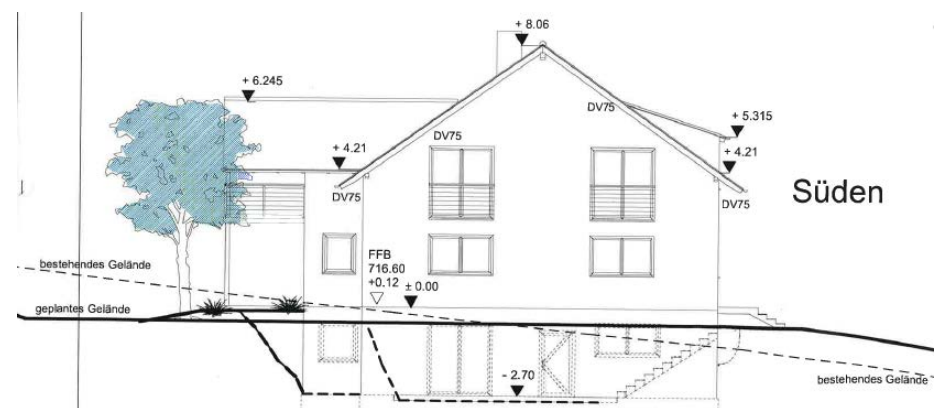

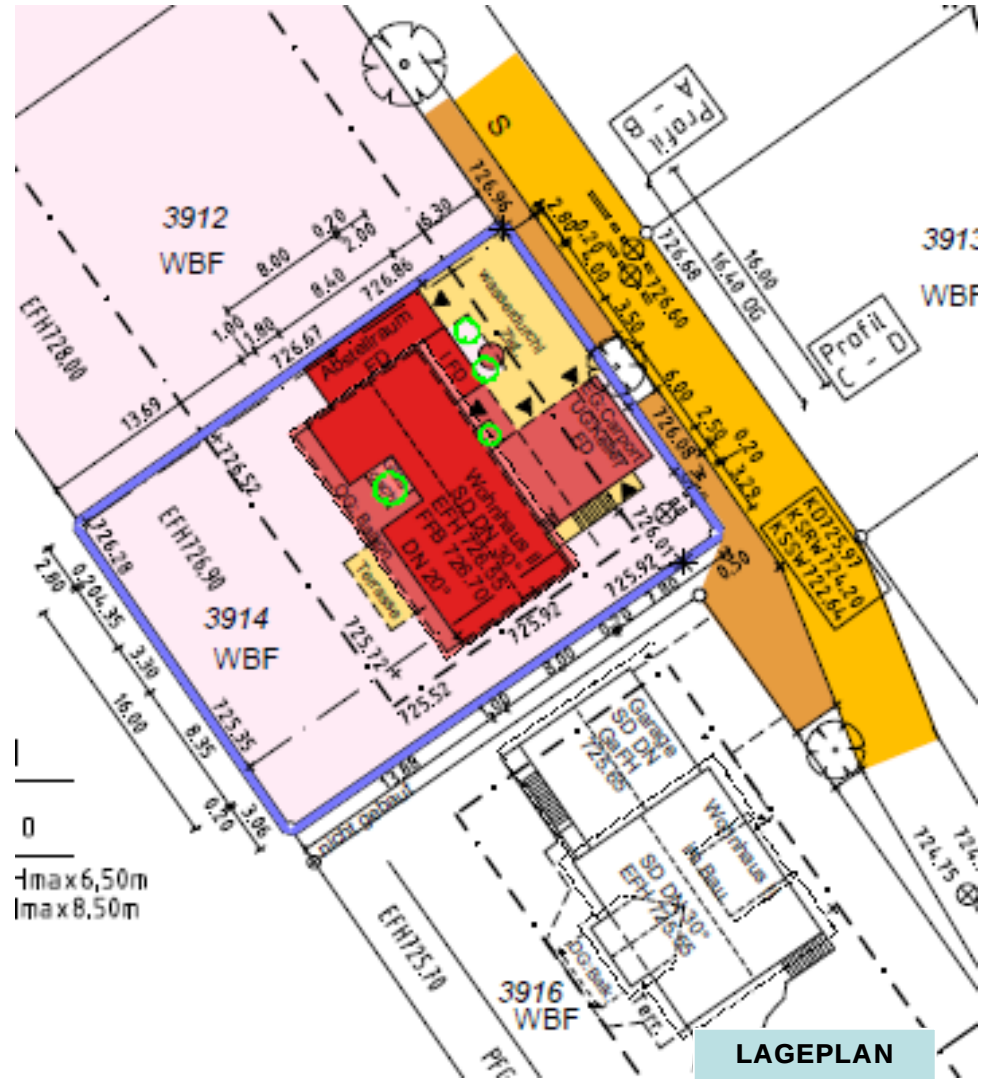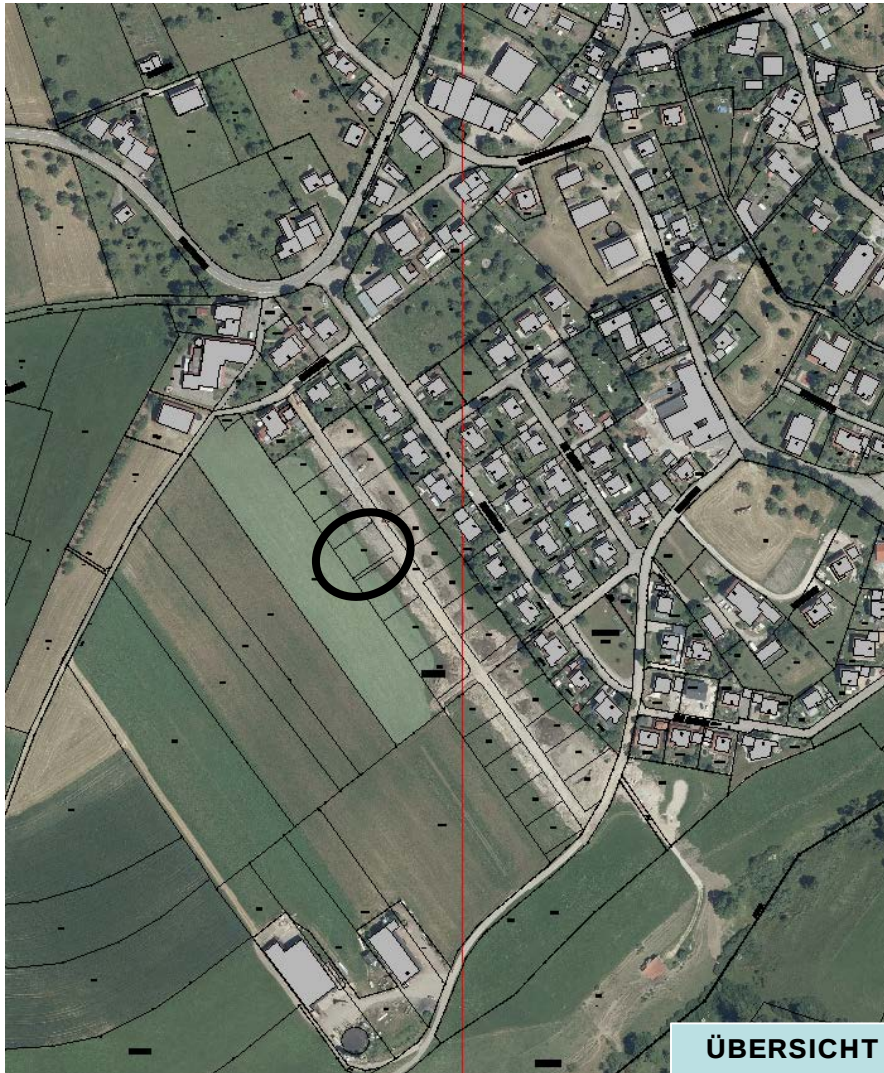




ANSICHT SÜD-OST, M. 1:100

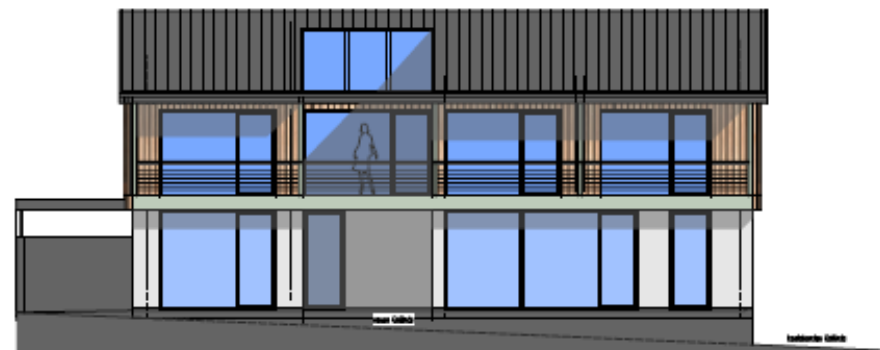

ANSICHT SÜD-WEST, M. 1:100

ANSICHTEN

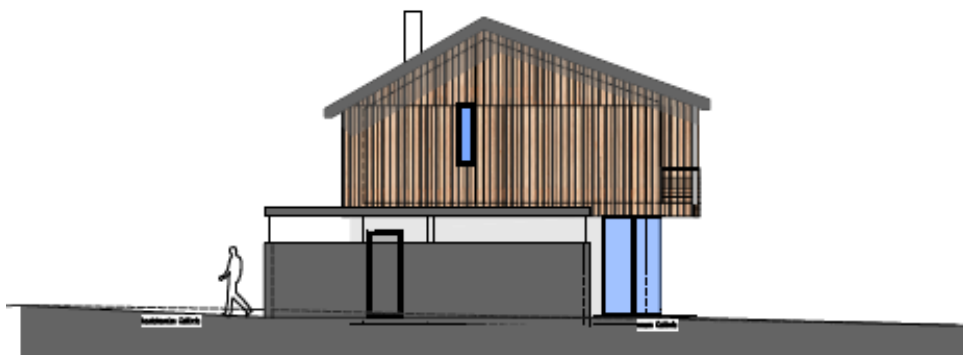


ANSICHT NORD-WEST, M. 1:100



ANSICHT NORD-OST, M. 1:100




ÜBERSICHT

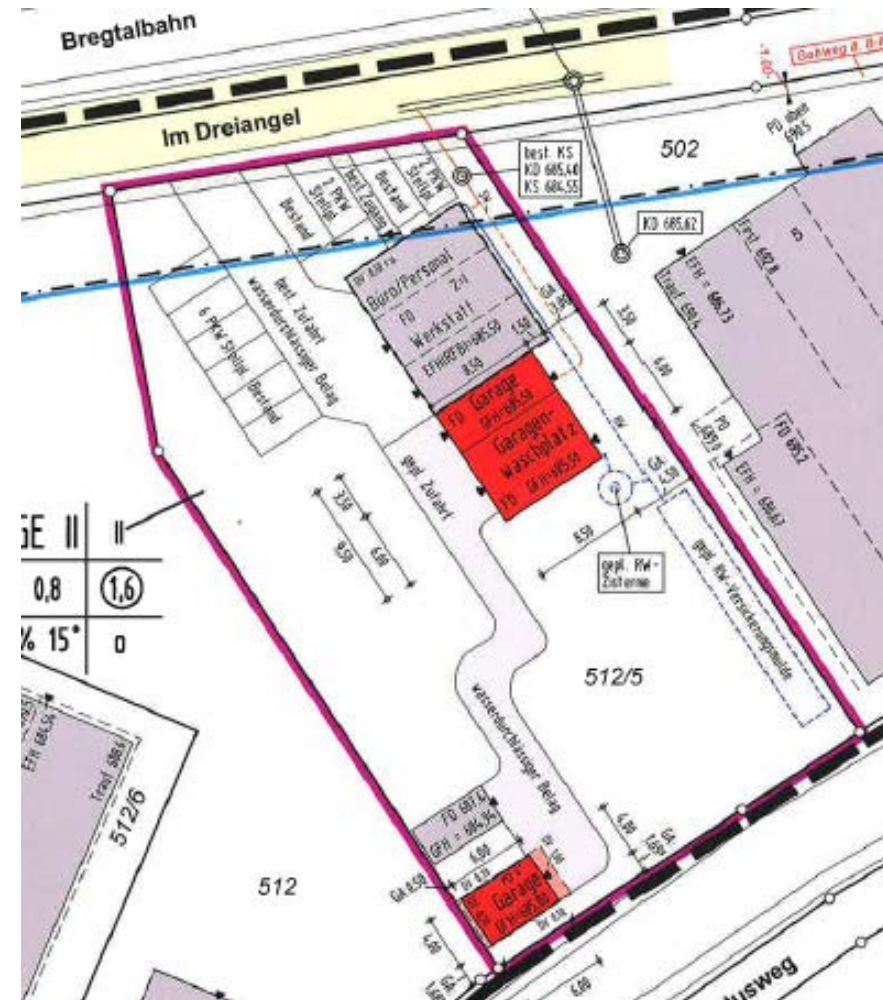


LAGEPLAN

Halle Ansicht Nord-West

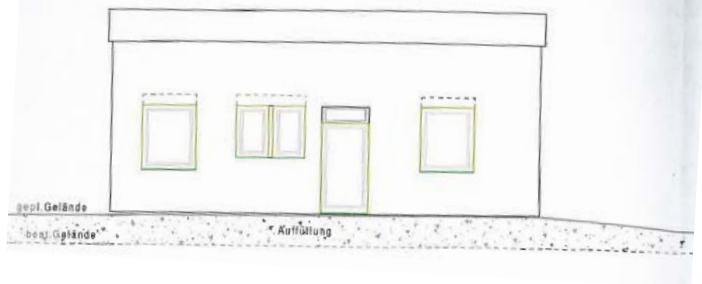


Halle Ansicht Süd-West

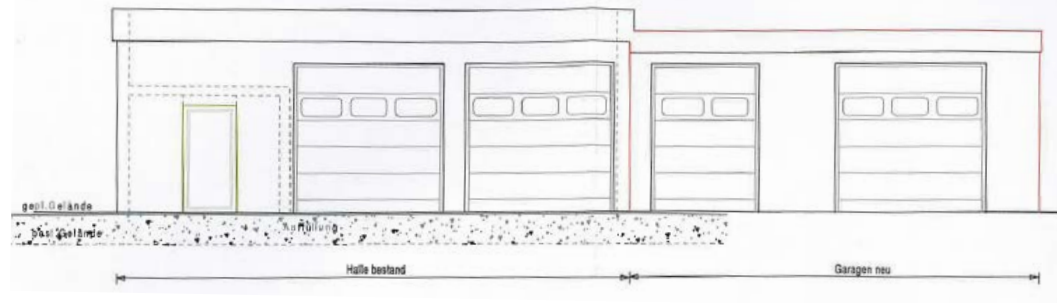


ANSICHTEN

Anbau einer Garage mit Waschplatz an best. Werkstatt


Halle Ansicht Süd-Ost

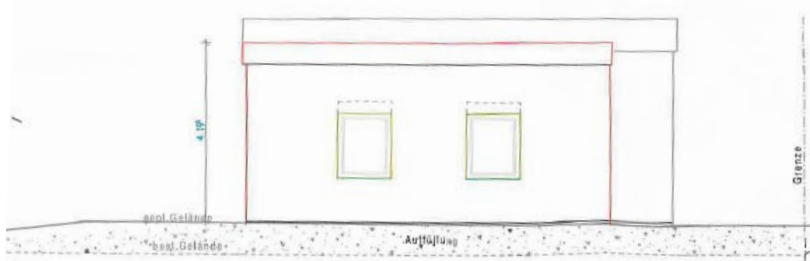


Halle Ansicht Nord-Ost

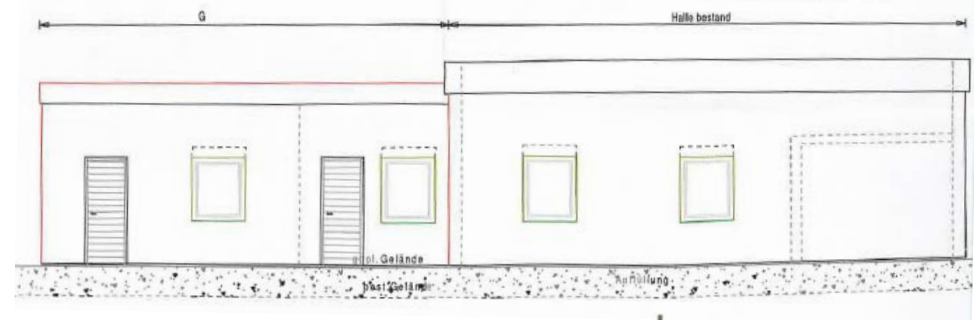

Ansicht Nord-Ost

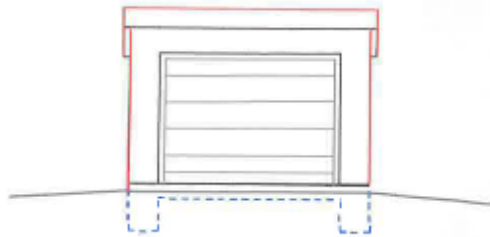


Ansicht Süd-Ost

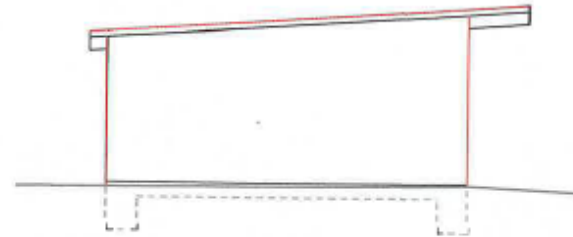



ANSICHTEN
Neubau einer Garage

Ansicht Nord-West

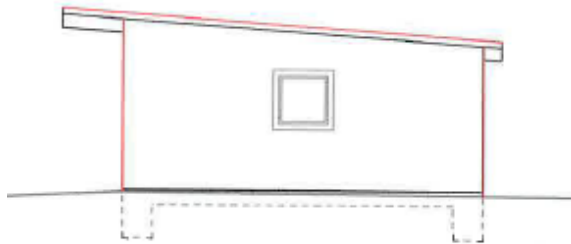


Ansicht Süd-West


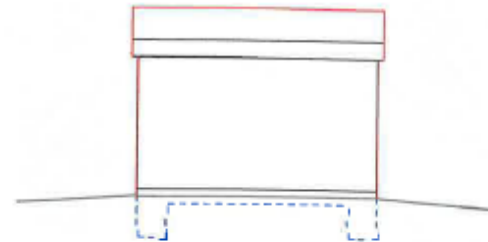


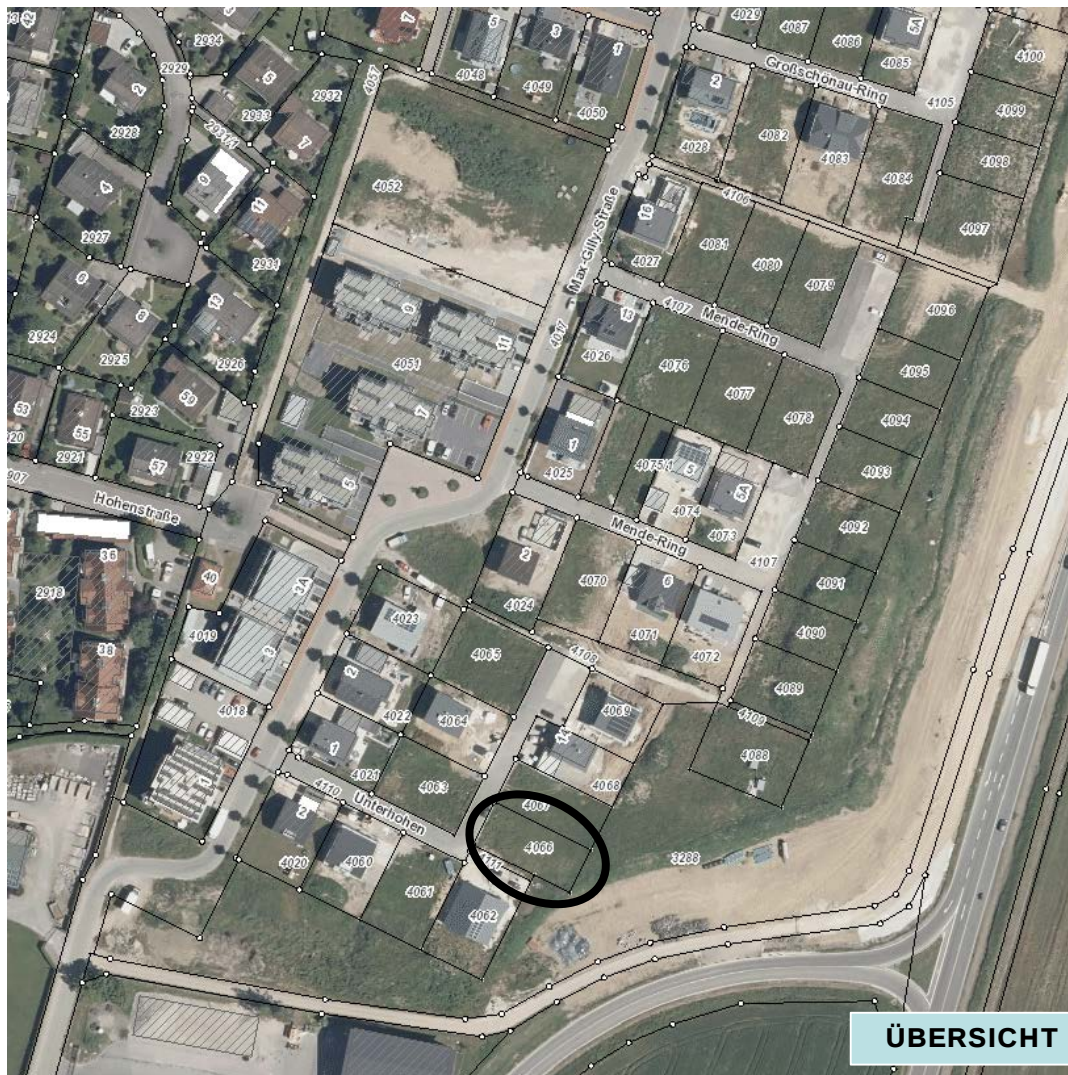


ÜBERSICHT

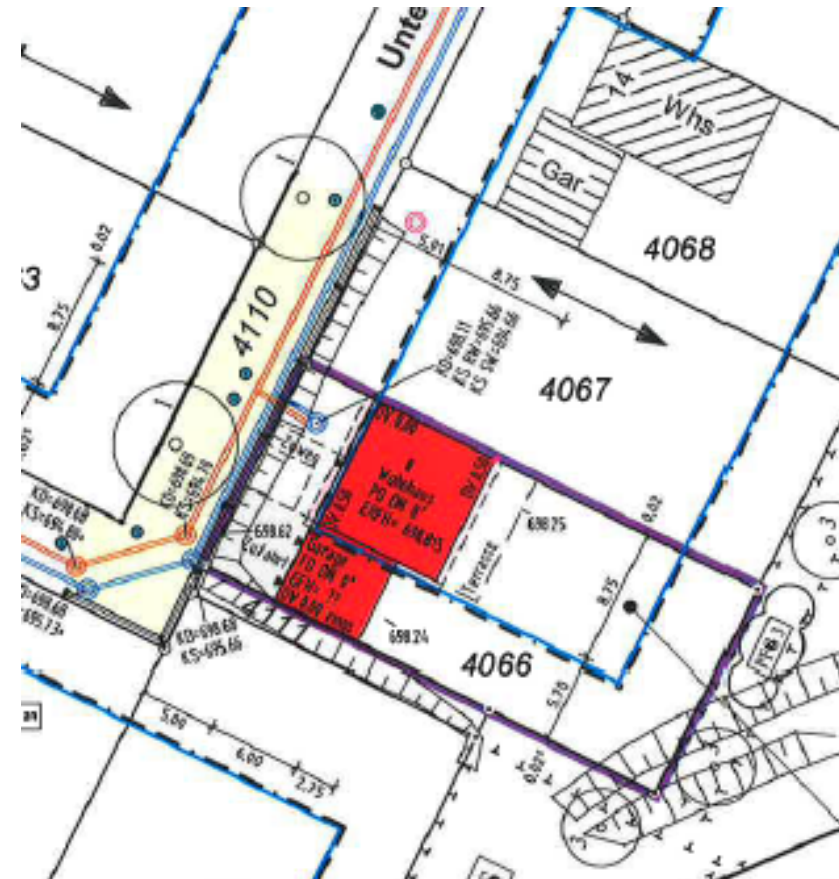

LAGEPLAN

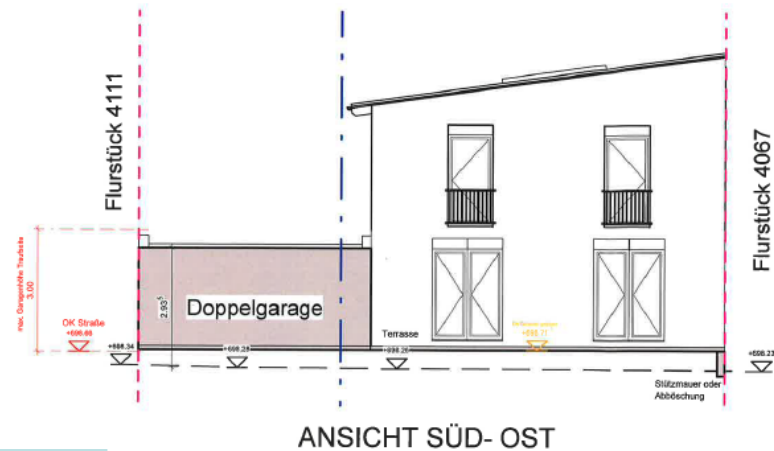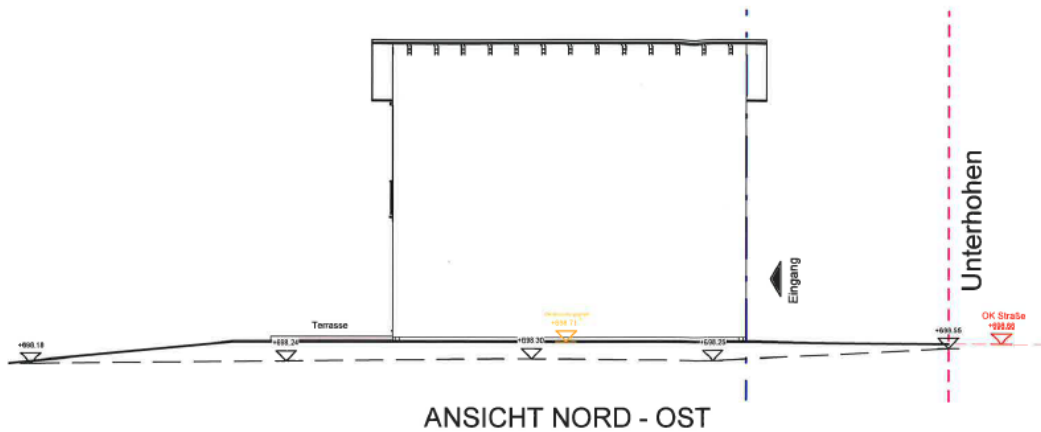

ANSICHTEN

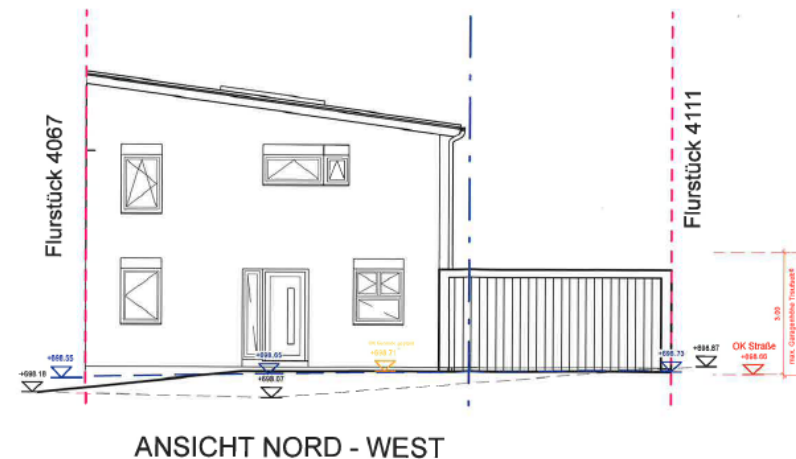



ÜBERSICHT



A diagram of a double door with a width dimension of 2.98. The door is shown with a central vertical line and a small horizontal line indicating the handle area. The dimension line is at the top, and the door is labeled '2.98'.

A diagram of a rectangular garden. Above the rectangle, a horizontal dimension line with arrows at both ends is labeled "6.00". The bottom edge of the rectangle is drawn with a textured, grass-like pattern.


The diagram shows a rectangular frame with a total width of 6.00 and a total height of 7.00. The frame is composed of four members, each with a thickness of 0.10. The supports are located at the corners of the frame, indicated by triangles labeled A, B, C, and D. The dimensions are as follows: the horizontal distance between the left and right supports is 6.00; the vertical distance between the top and bottom supports is 7.00. The frame members are labeled with their respective dimensions: the top member is 6.00 long and 0.10 thick; the bottom member is 6.00 long and 0.10 thick; the left member is 7.00 high and 0.10 thick; and the right member is 7.00 high and 0.10 thick. The supports are located at the corners of the frame, with A at the top-left, B at the top-right, C at the bottom-right, and D at the bottom-left.

ANSICHTEN

Technical drawing of a rectangular plate. The overall width is 2.98 and the overall height is 1.62. There are two rectangular holes, each with a width of 0.40. The distance between the centers of the holes is 1.62. The distance from the left edge to the center of the left hole is 0.40, and the distance from the right edge to the center of the right hole is 0.40. The distance from the top edge to the center of the holes is 0.41.





ÜBERSICHT

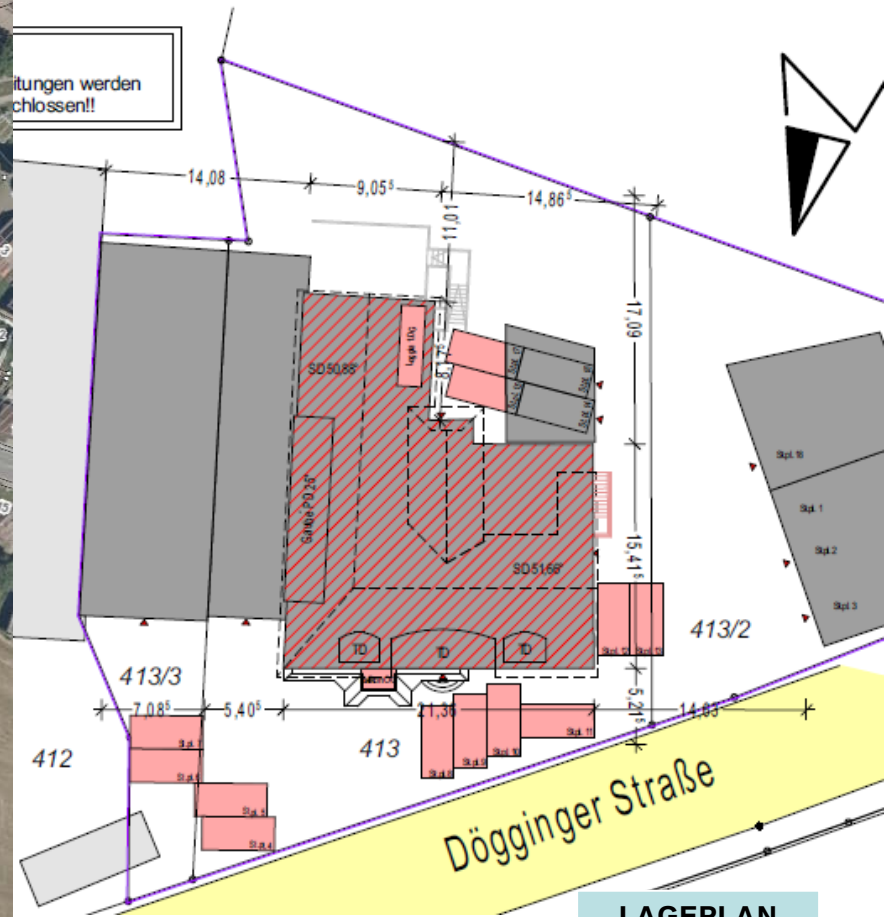

LAGEPLAN




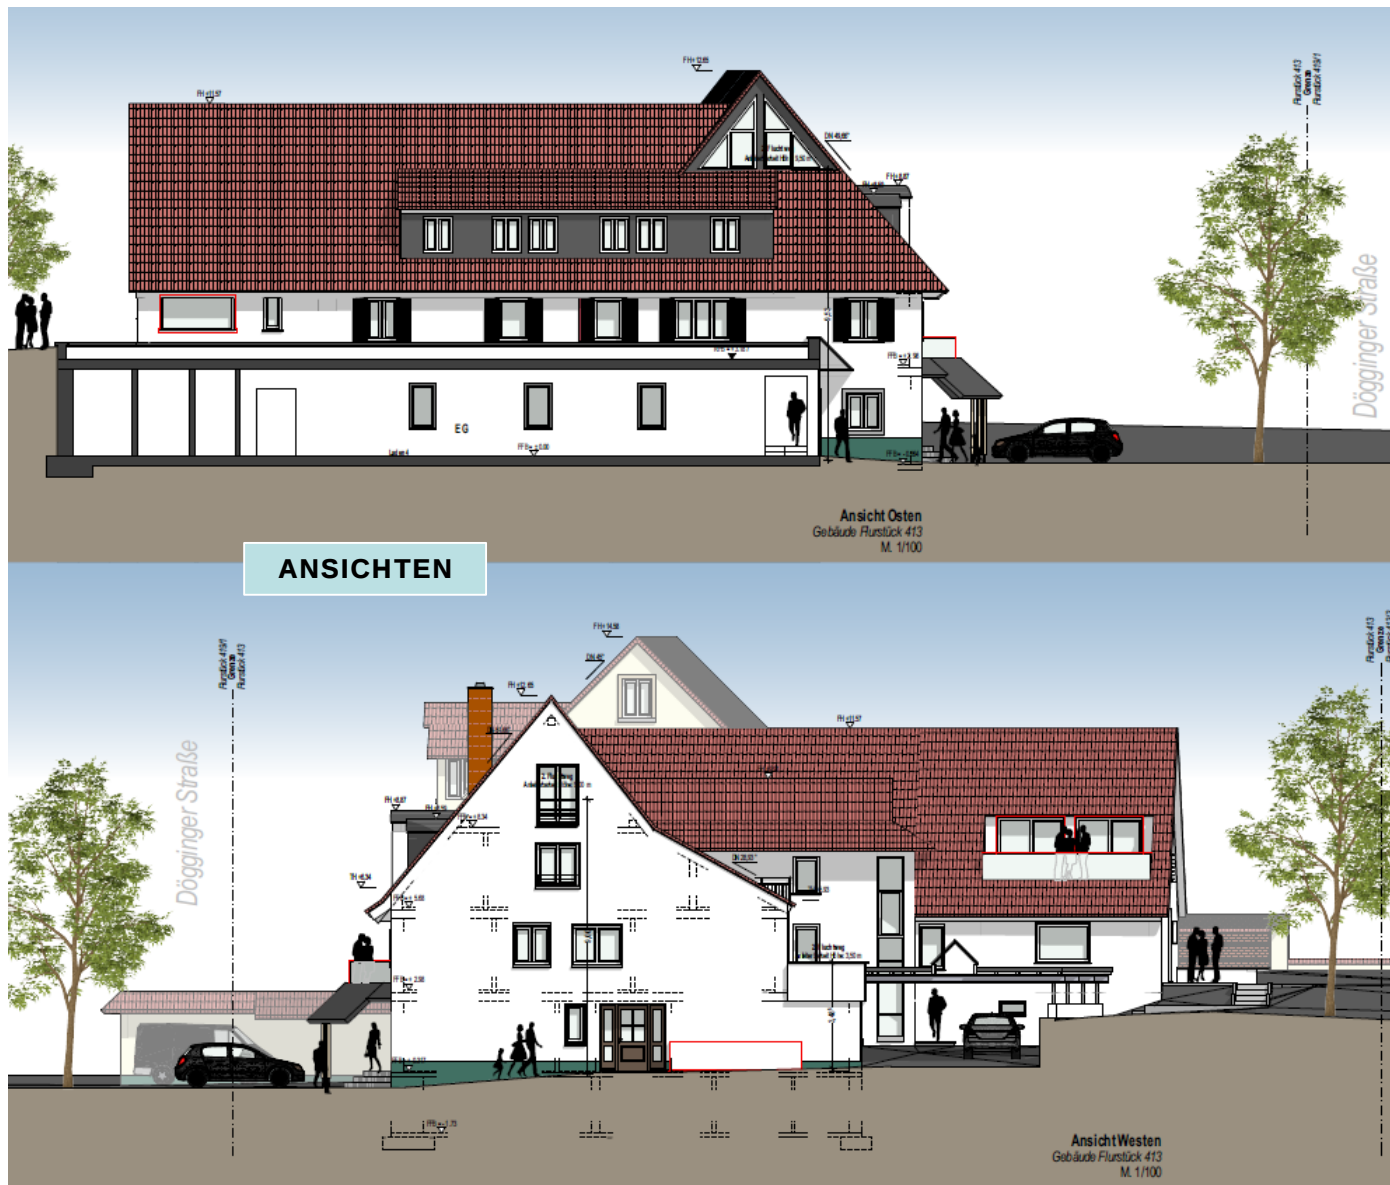


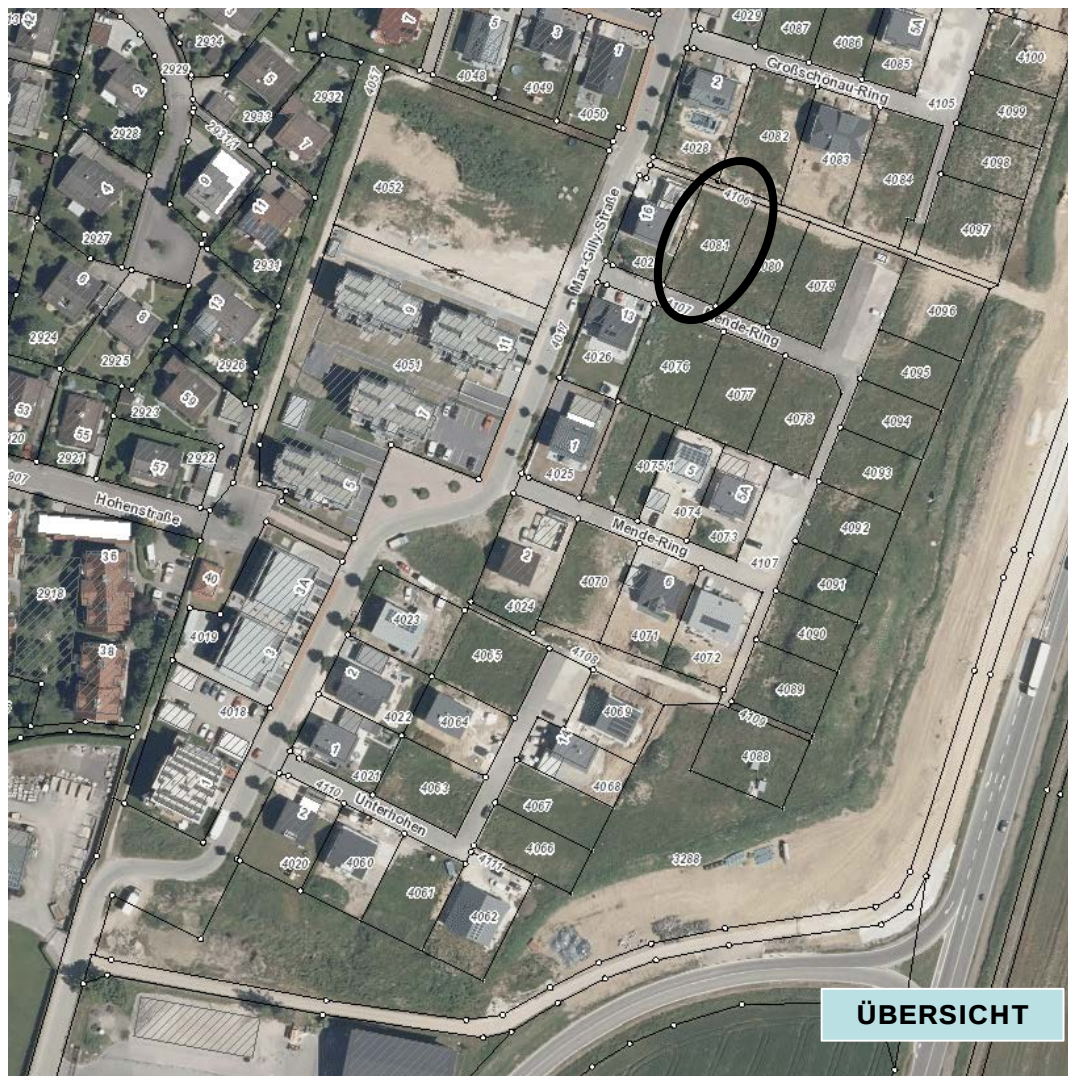



ÜBERSICHT




LAGEPLAN

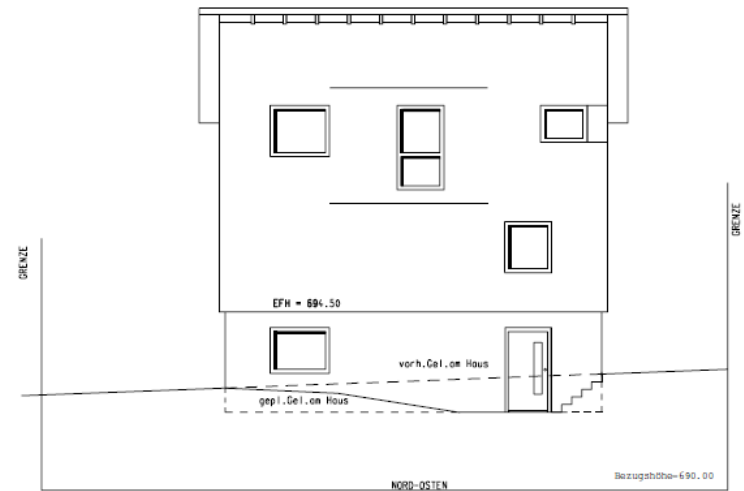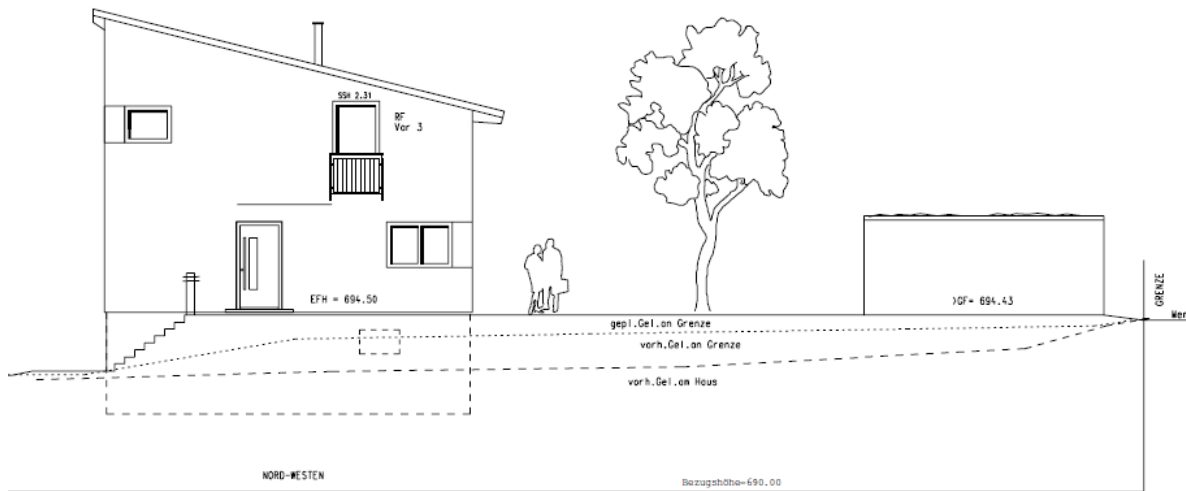

ANSICHTEN

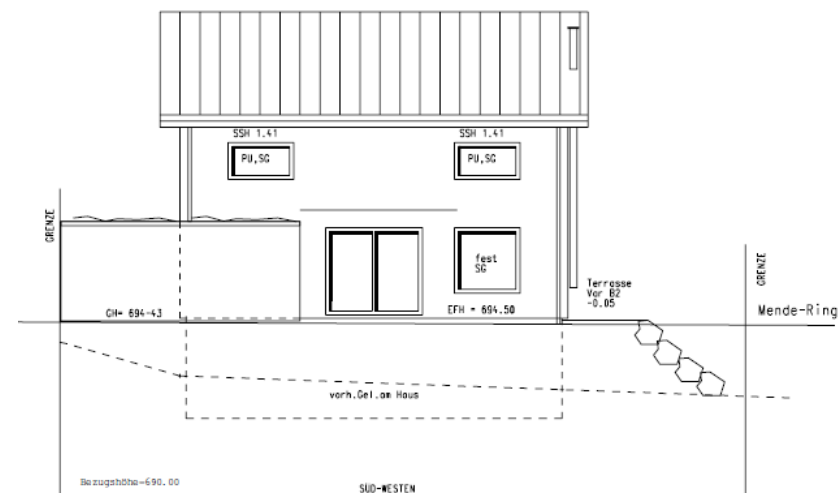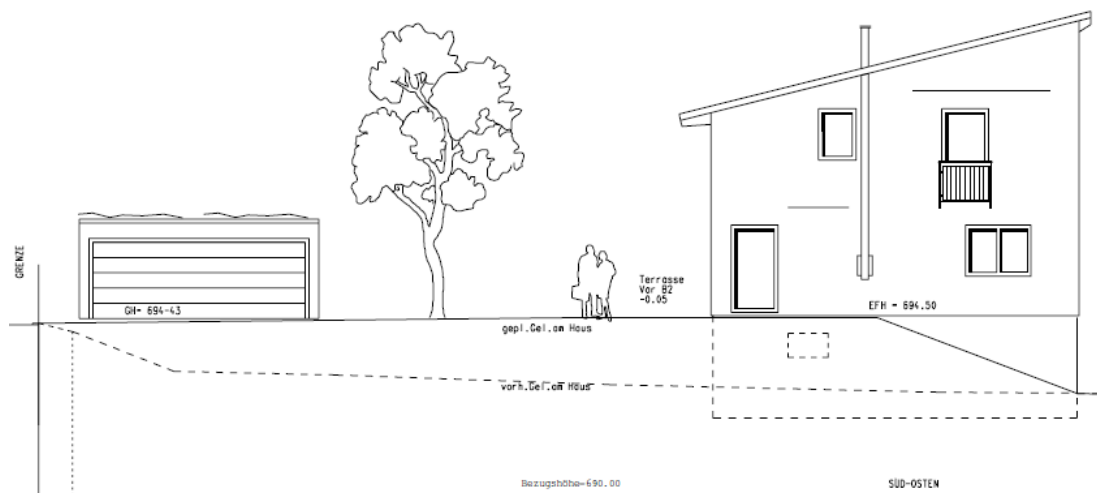

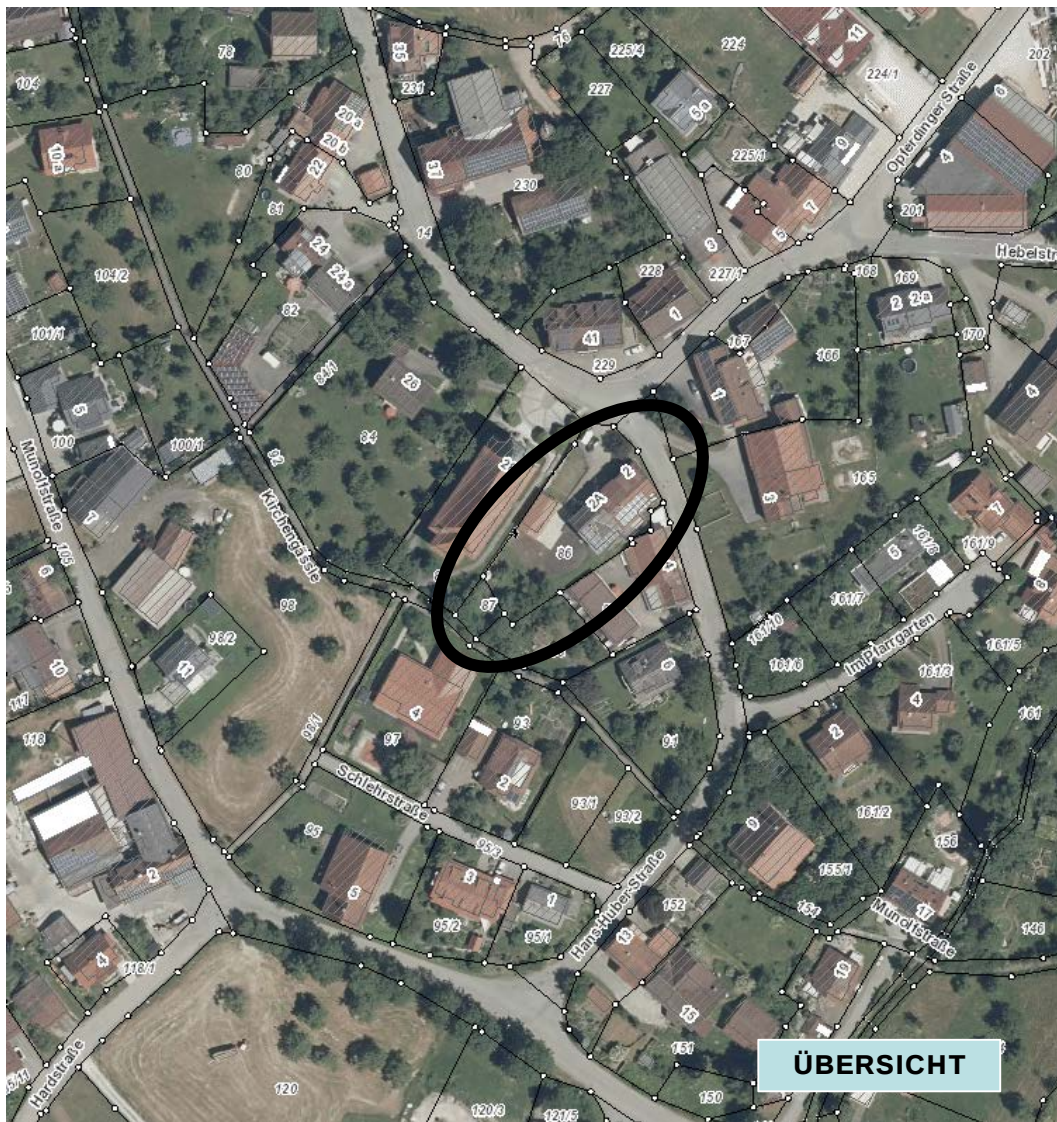


ÜBERSICHT



LAGEPLAN

Ansicht Südwest

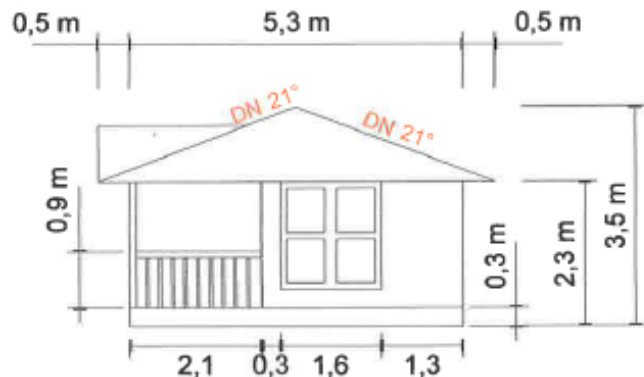

Ansicht Nordwest





ANSICHTEN

Ansicht Nordost



Ansicht Südost

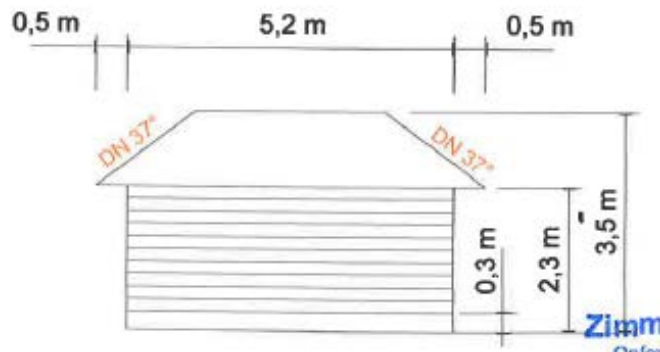

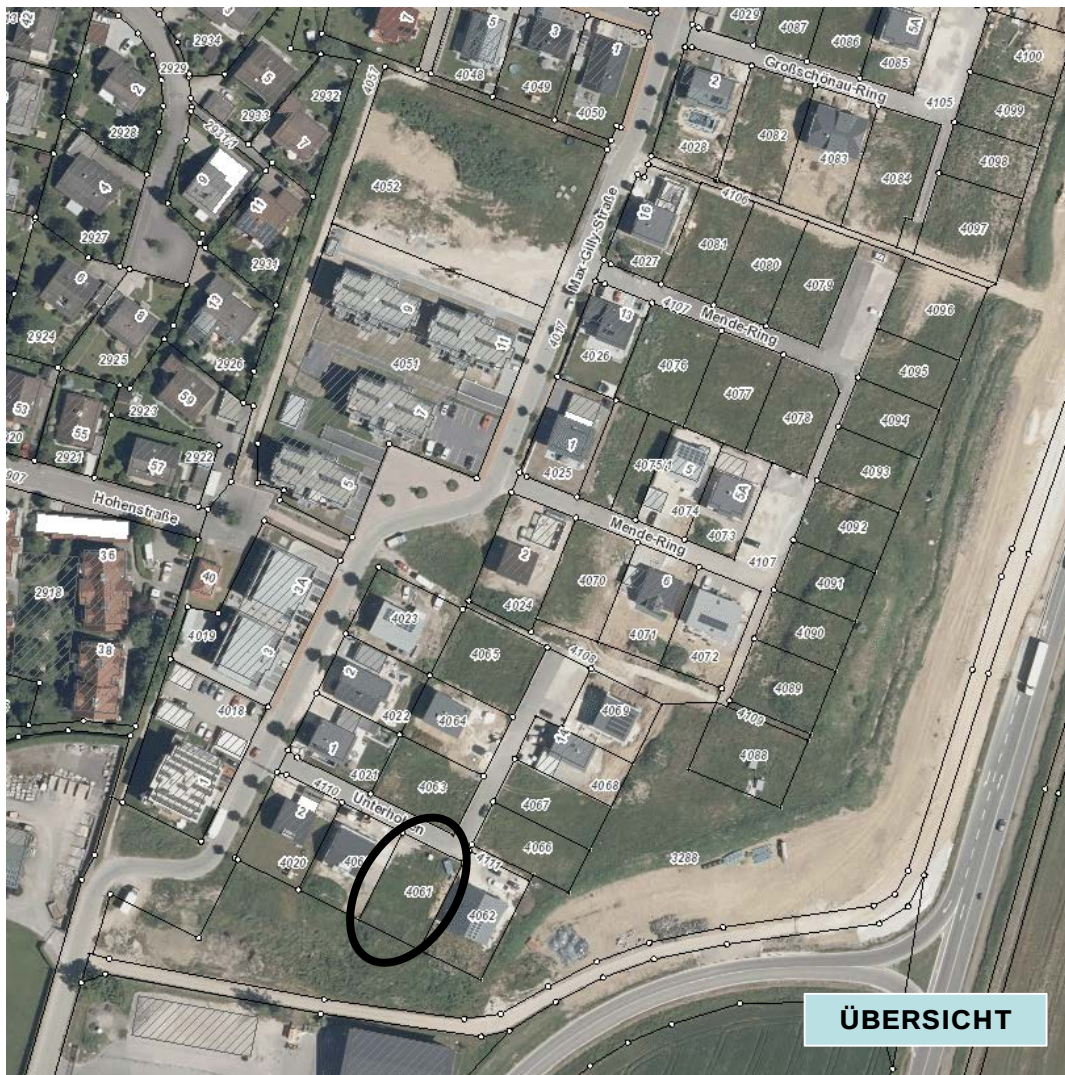


ÜBERSICHT



LAGEPLAN

WESTEN

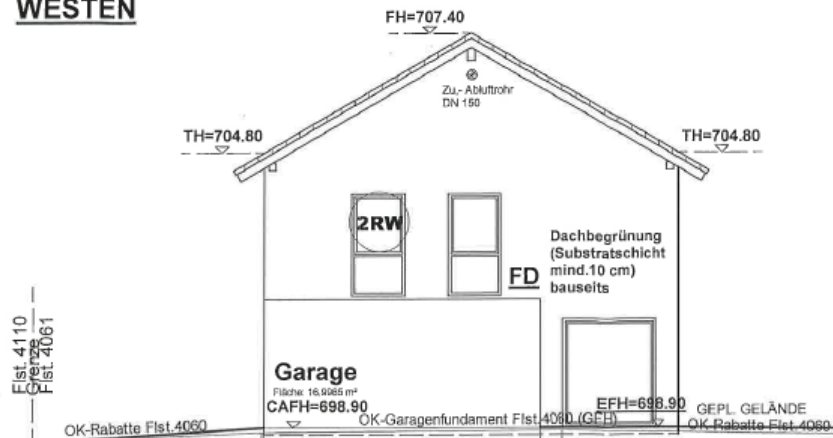


NORDEN



ANSICHTEN

OSTEN

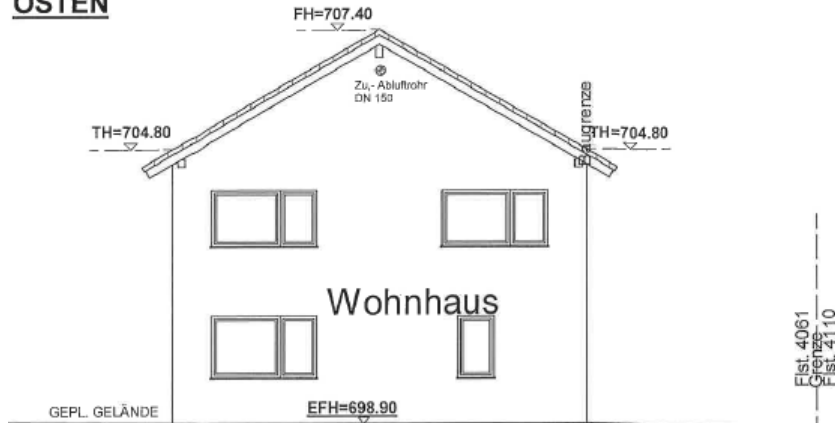

SÜDEN

